



INDUSTRY 4.0

- Machine Built-in with OPC-UA interface

HIGHLIGHT PERFORMANCE

- Servo motor drive
- Visual HMI operation interface
- 10.4 inch or larger Touch-operated screen
- High precision metering, closed loop monitoring, automatic proportion correction
- Microinjection, volume range Min.0.12ccm/min to Max.30ccm/min
- Suitable for dust-free workshops and high-end product production
- Accept ordering in accordance with FDA standards

FUTURE ADVANTAGE

- Scalable future needs
- High-precision color metering device
- Or Other needs can be consulted

LSR
Micro shot
e-Master
PFM SERVO




OPTIONS



DESCRIPTION

- This type of equipment is suitable for high-demand, high-quality precision injection production, and the equipment must be customized according to the requirements
- Minimum injection volume A+B = 0.12ccm
- Maximum injection volume A+B = 30 ccm
- Suitable for long-term implanted medical products, Optical products, acoustic products, micro injection molding, etc.
- The raw material packaging can be: 0.45 liters, 1 liters, 5 liters, 10 liters, 20 liters or 200 liters

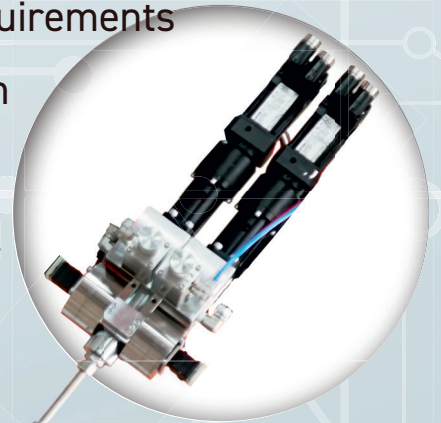

TECHNICAL DATA

Viscosity	1,000,000 mPas
Output mixed material	Min. 0.12 ccm to Max. 30ccm/min (depending on viscosity)
Mixing ratio	1:1 or variable
Color metering	depending on offer
Actuation	Servo motor drive
Electric data	380-480 VAC, 50-60 Hz (3P+PE), 16A or 230-400 VAC, 50-60Hz (3P+PE) 16A
Connection LIM machine	24V
Pneumatic system	R1/4", 6 bar low
Weight	450 to 650 kg
Dimensions	1,030 x 1,112 x 1,950 mm (W x D x H)



2KM MUCOMAC Multi component special machinery (Guangzhou) Co., Ltd
Add: No. Sheng Li Industrial Park North of Chao tian industrial zone shi Lian Lu
Shi Lou Town Panyu Distri Guangzhou P.R.C Postcode: 511447

Tel: +8620 - 34852366 / 2866
Fax: +8620 - 34852966 / 2566
Email: info@2kmmucomac.com

www.2kmmucomac.com

www.mucomac.com

Service hotline

400-900-3889